



# CRETE-PLANE®

SURFACE PREPARATION, FLOOR GRINDING & REMOVAL

<b>CPL-8</b>	<b>MODEL #</b>	<b>CPL-8G</b>	<b>CPL-8E</b>
	<b>PART #</b>	69500	69300
	<b>POWER</b>	Gasoline	Electric
	<b>ENGINE/MOTOR</b>	Honda GX160	1.5HP 115V/20A
	<b>PHASE</b>	N/A	Single
	<b>AMPS</b>	N/A	17.2
	<b>*RPMS</b>	2222	1065
	<b>LENGTH</b>	31"	31"
	<b>WIDTH</b>	19"	19"
	<b>HEIGHT</b>	42.5"	42.5"
<b>LEVEL REMOVE</b>	<b>WEIGHT</b>	150 lbs	145 lbs
	<b>ADDITIONAL MAX CORD LENGTH</b>	N/A	25 ft 10 Gauge



**PRODUCTION RATE:** 8" working width planes approximately 175-250 sq ft per hour at 1/32" depth per pass.


**PRODUCT NOTES:** Uses the same carbide cutters as the CPM-8 model Crete-Planer®. Comes standard with loaded drum & universal vacuum port hookup. Gasoline or Electric power options available. 25 ft. 12 Gauge Power Cord attached.

#### IDEAL FOR:

- Removing Paint, urethane, thin-set and coatings
- Etch and prep surfaces for new coatings
- Removing Traffic lines
- Texturing slippery surfaces




CPL-8

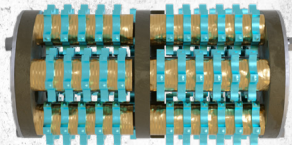

**CPL-8 DRUM**  
Part# 66309C  
(6 Shaft Drum)



**CARBIDE CUTTERS**  
6 Pt Part# 20156  
(6 Shaft Drum)



**STEEL CUTTERS POINTED**  
18 Pt Part# 20236  
(6 Shaft Drum)

## CRETE-PLANE® START-UP PACKAGES

PART #	ITEM	DESCRIPTION
A212	Start-up Package One (Drum not included)	66 CP206-T Cutters, 234 Spacers, 6 Shafts

### LEVEL

Uneven Joints, Bumps,  
Uneven Surfaces

### REMOVE

Remove old Coatings and Paints,  
Swimming Pool Cool Deck, Removal  
of Contaminated Surfaces, Removal  
of Build ups (Oil, Grease, etc) Remove  
Rubberized Membranes

ENGAGE/DISENGAGE LEVER

ELECTRICAL PLUG AND CORD


DEPTH CONTROL KNOB

ON/OFF SWITCH

COMES STANDARD  
6 SHAFT DRUM  
WITH 66 CUTTERS  
AND 234 SPACERS

VACUUM PORT

LIFTING HANDLE

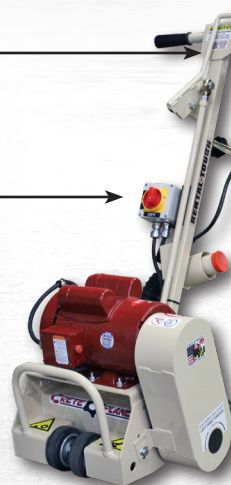

\* RPM's are based on the machine's accessory speed. \* NET HORSEPOWER STATEMENT - \*As rated by the engine manufacturer. The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the opening speed of the engine in application, environmental conditions, maintenance, and other variables. \*\* Call for availability. **WARNING: CALIFORNIA PROPOSITION 65: Please read page 53 for warnings.**

1-800-638-3326 • edcoinc.com • edcostore.com • edcoed.com