



MASONRY SAWS

BB-14

MASONRY SAWS

MAX CUTTING DEPTH 5"



MODEL #	BB-14G	BB-14G	BB-14E
PART #	26300	26500	22300
POWER	Gasoline	Gasoline	Electric
HORSE POWER	GX160	GX270	1.5 HP, 115V/20A
PHASE	N/A	N/A	Single
AMPS	N/A	N/A	14.4
*RPMS	3469	3076	2415
LENGTH	42.25"	42.25"	42.25"
WIDTH	25"	25"	25"
HEIGHT	37"	40"	32"
WEIGHT	175 lbs	217 lbs	165 lbs
MAX CORD LENGTH	N/A	N/A	50 ft, 10 Gauge

PRODUCT NOTES: 14" blade capacity. Adjustable cutting head used manually or locked in a fixed position. Gasoline units 3-stage air filters that protect from wear. Electric BB-14 unit has a totally enclosed fan-cooled motor. Gasoline units include a belt driven connectable and disconnectable water pump. Electric unit includes a 115V submersible water pump.

REQUIRES 1 - 14" Brick/Block Blade.


IDEAL FOR:

- Brick, block, pavers & stone
- Professional masons
- Paver installers
- Paver manufacturers
- Landscape suppliers
- Masonry suppliers
- Rental stores




BB-14

BB-14 FIXED ENGINE PLATFORM INCREASES ENGINE LIFE



FOLDING STANDS
UPRIGHT LEVEL CUTTING
BB-14 Models:
PART # 40631

PROCART
GROUND LEVEL OR UPRIGHT CUTTING
BB-14 Models:
PART # 24950

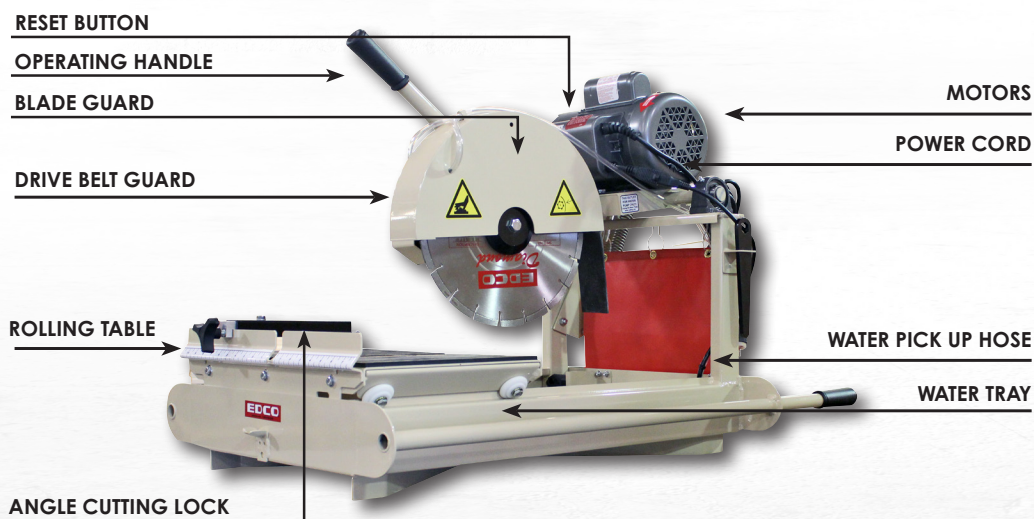

* RPM's are based on the machine's accessory speed. * NET HORSEPOWER STATEMENT - *As rated by the engine manufacturer. The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the opening speed of the engine in application, environmental conditions, maintenance, and other variables. ** Call for availability. **WARNING: CALIFORNIA PROPOSITION 65: Please read page 53 for warnings.**