

SELF PROPELLED SAWS

PROFESSIONAL SAWING EQUIPMENT

EDCO
PROFESSIONAL SAWING EQUIPMENT

SS-20

**20" SELF
PROPELLED
CONCRETE
AND
ASPHALT
SAWS**

**MAX
CUTTING
DEPTH
7 3/4"**



MODEL #	SS-20	SS-20E	SS-20P
PART #	32600	33100	34600
POWER	Gasoline	Electric	Propane
ENGINE/ MOTOR	Honda GX630	10 HP, 230/30A	Kohler CH730LP
PHASE	N/A	Three	N/A
AMPS	N/A	23.6	N/A
*RPMs	2760	2835	2760
LENGTH	46"	47.5"	46"
WIDTH	25"	25.25"	25"
HEIGHT	40"	40"	40"
WEIGHT	465 lbs	478 lb	505 lbs
MAX CORD LENGTH	N/A	100 ft, 10 Gauge	N/A


PRODUCT NOTES: Stressproof, precision- machined, 1 1/32" steel arbor shaft. Includes electric start, 12 volt battery and heavy-duty 15-amp charging system. Swing-away, 3 gallon fuel tank. Screw-type depth control with lock guarantees accurate cutting. **Optional water pump kit available part# 51270**

REQUIRES 1 - 20" concrete or asphalt blade

IDEAL FOR:

- Highway, road and bridge repair
- Utility installation
- Indoor & out door applications
- Patch repairs in asphalt and concrete
- Trenching

SS-20

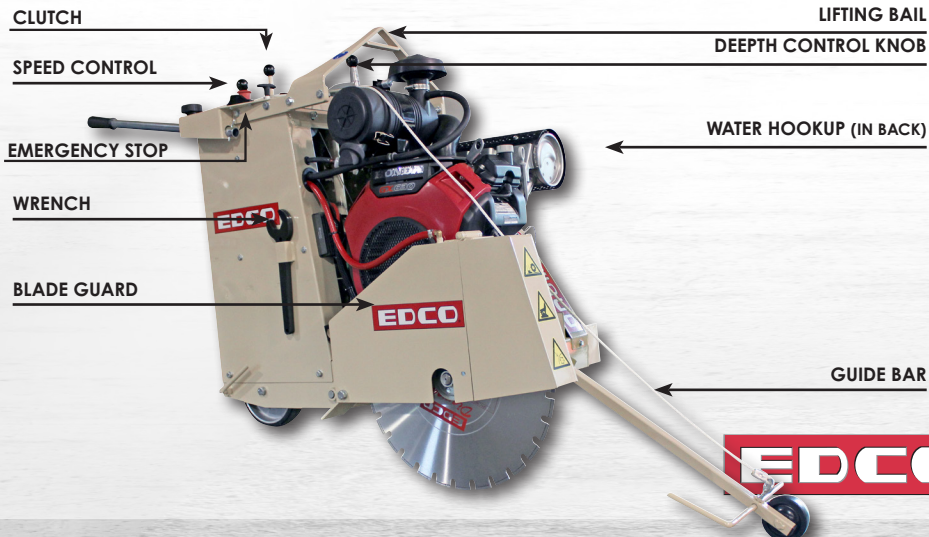

* RPM's are based on the machine's accessory speed. * NET HORSEPOWER STATEMENT - *As rated by the engine manufacturer. The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the opening speed of the engine in application, environmental conditions, maintenance, and other variables. ** Call for availability.

WARNING: CALIFORNIA PROPOSITION 65: Please read page 53 for warnings.